



895断路器/Breaker connector












产品参数/Technical data

型号 Model	895
壳体 Housing	防火阻燃 Fire and flame retardant UL94V-2
连接件 Conductor	铜 Copper
额定输出 Rated power	20A 500VAC
额定脉冲电压 Rated pulse voltage	4000V
防护等级 IP code	IP20
过压类别 Overvoltage category	II
温度范围 Temperature range	- 20~150°C
接线范围/Rated connecting capacity	0.75~2.5mm ²
接线类型/Type of terminal	螺丝式 Screw-type terminal
极数 Number of poles	2P+PE
产品尺寸 Product Size(参考实际尺寸图)	53.3*40.6*40.4mm (Refer to actual drawing)
认证 Certification	ENEC UKCA CB CE ROHS
拔插寿命 Mechanical endurance	5000



产品图纸/Product drawings

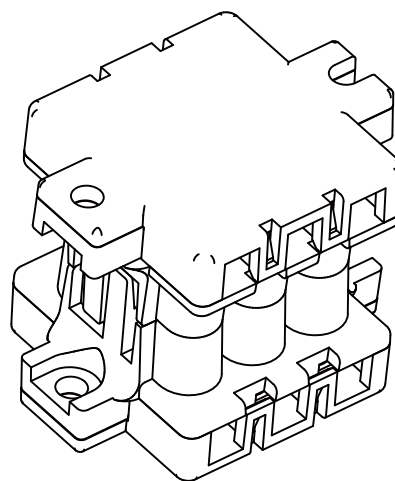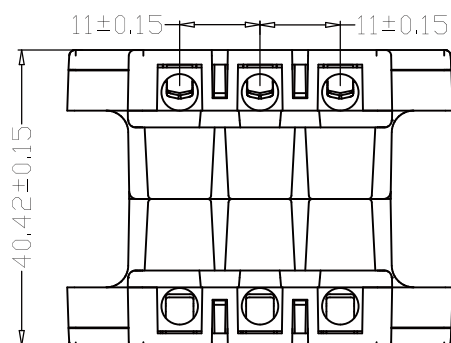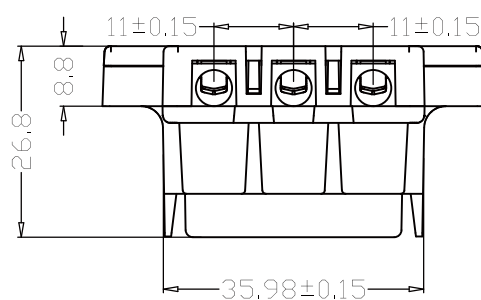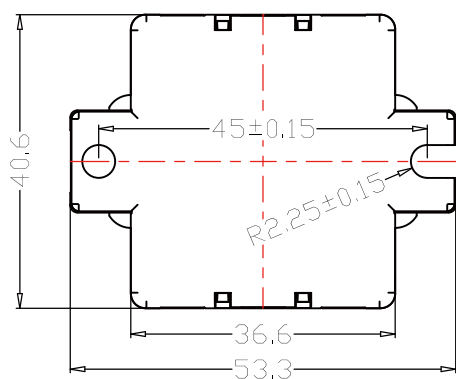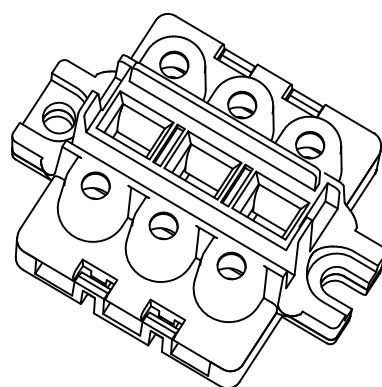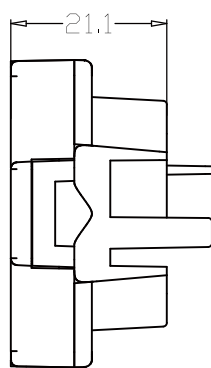

深圳市格林威电子有限公司

工程部 (签名)	模具部 (签名)	审核 (签名)	年、月、日 (年月日)	料号		产品图
谢东						895断路器