





防雷器/Surge Protection Device series GSPD4



RoHS

产品应用图

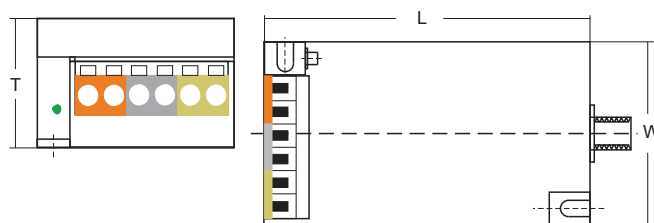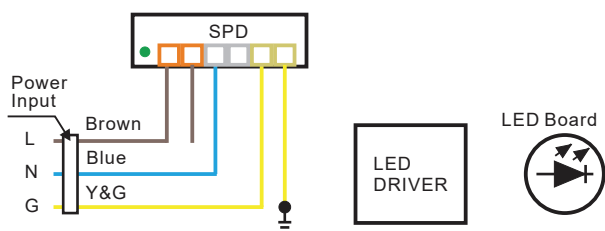



产品参数/Product parameters GSPD4/10kV

规格/Datasheet	欧规/TUV/CE
工作电压/Input Voltage(Uc)	320VAC 50Hz
保护电压/Protection voltage(Up)	L-N:≤1.25kV L-PE:≤1.5kV N-PE:≤1.5kV
最大持续电压/Maximum Continous Voltage(Mcov)	320V
冲击电压/Uoc	10kV
标准放电电流/Standard discharge current In (8/20uS)	5kA
最大放电电流/Standard discharge current Imax (8/20uS)	10kA
标准漏电流/Standard Leakage Current	<50uA
响应时间/Response Time	<25nS
接口类型Interface Type	3线/ Wires
连接类型/Connection Type	串联/Series
阻燃等级/Flame Rating	UL 94-V0/V1
相对湿度/Relative Humidity	<95%(25°C)
海拔高度/Above Sea Level	<3000m
工作温度范围/Operating Temperature Range	-40-+85°C
储存温度范围/Storage Temperature Range	-40-+125°C
尺寸/Dimensions	LXTXW=80*38*50mm
产品证书/Certification	TUV CE RoHS
包装/Package	55g/pcs
质保/Quality Assurance	根据国家三包政策质保1年（雷击损坏不在质保范围内） 1 year warranty according to the national three guarantees policy (lightning damage is not covered by the warranty)



产品参数/Product parameters

GSPD4-20/20kV

规格/Datasheet	欧规/TUV/CE
工作电压/Input Voltage(Uc)	320VAC 50Hz
保护电压/Protection voltage(Up)	L-N:≤1.4kV L-PE:≤1.5kV N-PE:≤1.5kV
最大持续电压/Maximum Continous Voltage(Mcov)	320V
冲击电压/Uoc	10kV
标准放电电流/Standard discharge current In (8/20uS)	10kA
最大放电电流/Standard discharge current Imax (8/20uS)	20kA
标准漏电流/Standard Leakage Current	<50uA
响应时间/Response Time	<25nS
接口类型Interface Type	3线/ Wires
连接类型/Connection Type	串联/Series
阻燃等级/Flame Rating	UL 94-V0/V1
相对湿度/Relative Humidity	<95%(25°C)
海拔高度/Above Sea Level	<3000m
工作温度范围/Operating Temperature Range	-40-+85°C
储存温度范围/Storage Temperature Range	-40-+125°C
尺寸/Dimensions	LXTXW=80*38*50mm
产品证书/Certification	TUV CE RoHS
包装/Package	55g/pcs
质保/Quality Assurance	根据国家三包政策质保1年（雷击损坏不在质保范围内） 1 year warranty according to the national three guarantees policy (lightning damage is not covered by the warranty)