



深圳格林威电子
GREENWAYCS

Tel: +0755-29756655

Fax: +0755-29756646

接线盒/Junction Box

M656



ADD: Building 90, 2nd Industrial area, Lisonglang Community, Gongming Street, Guangming District, Shenzhen, China

中国·广东省·深圳市·光明区公明街道李松荫社区第二工业区 90 栋

Website: www.greenwaycs.com




产品参数/Product parameters

型号 Model	M656
壳体 Housing	防火阻燃 Fire and flame retardant UL 94V-2
额定电流 Rated power	9A
额定电压 Rated voltage	250VAC
防护等级 IP code	IP54
适配端子 Terminal	2/3芯端子台 2/3PolesTerminal
工作温度 Working	-5~60℃
固体 Solid	0.5~0.75mm ²
接线类型 Type of terminal	螺丝式 Screw-type terminal
极数 Number of poles	2/3 poles
产品尺寸 Product Size 参考实际尺寸	64*27*15mm Refer to actual
认证 Certification	ENEC UKCA CB CE RoHS
测试标准 Testing standard	EN:60998-1:2004 EN:60998-2-1:2004



产品图纸/Product drawings

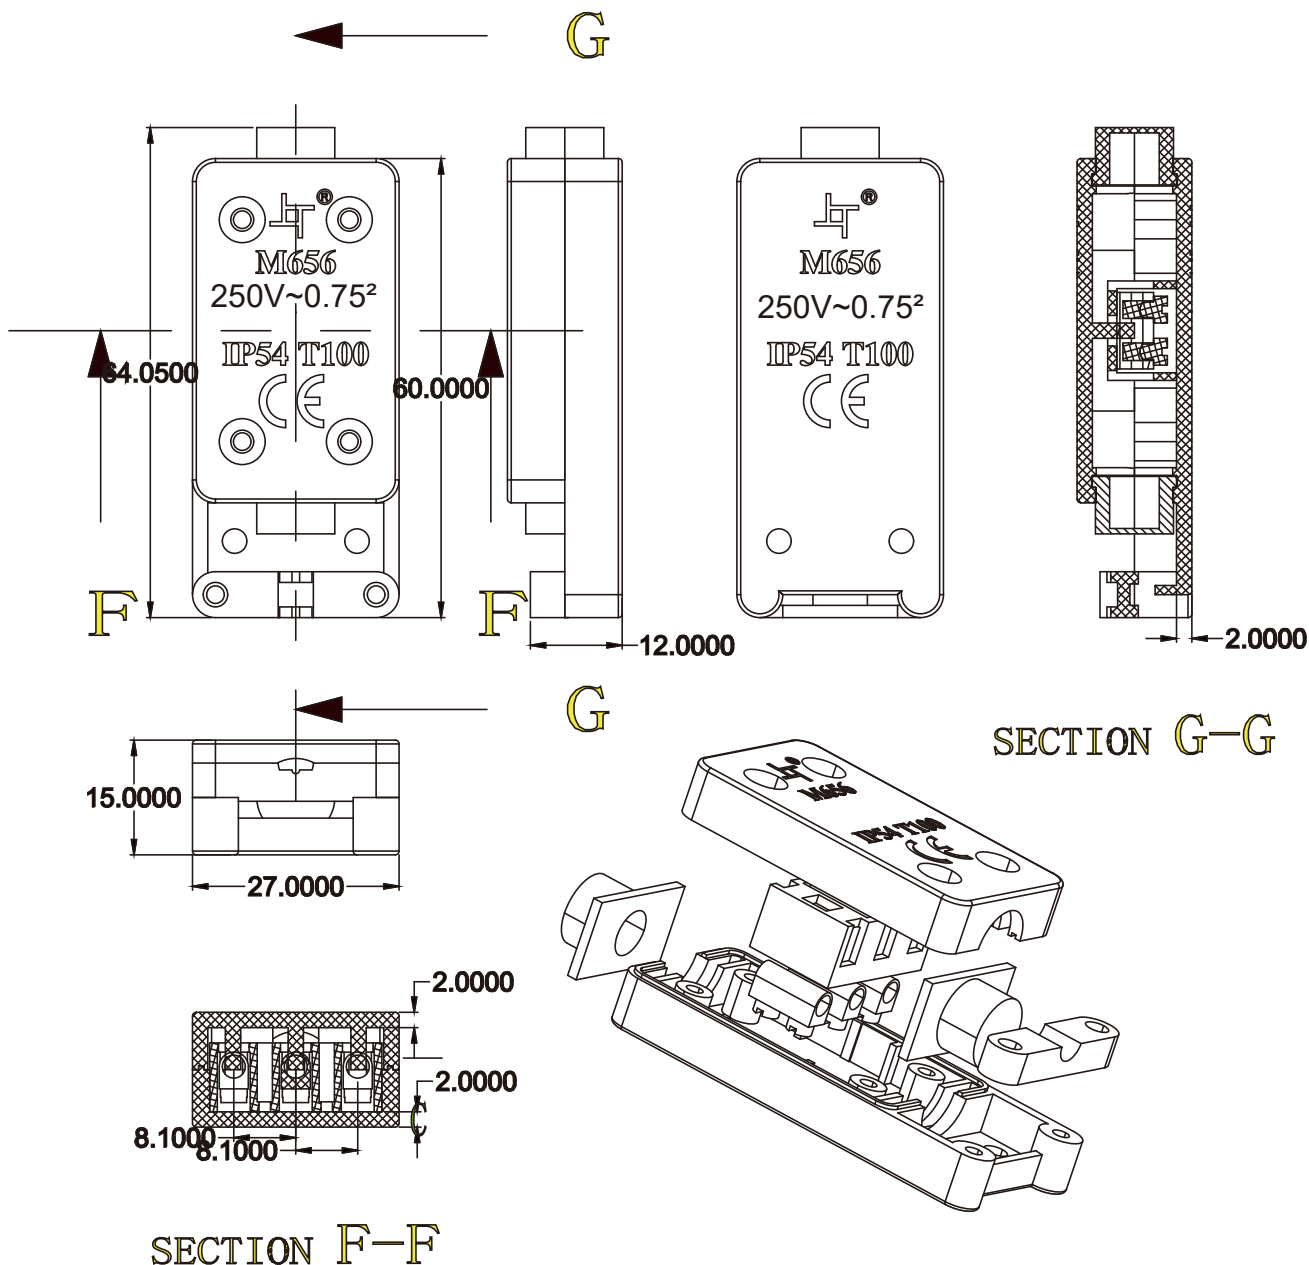

深圳市格林威电子有限公司

工程部 (签名)	模具部 (签名)	审核 (签名)	年、月、日 (年月日)	料号		产品图
谢东						M656