



深圳格林威电子
GREENWAYCS

Tel: +0755-29756655

Fax: +0755-29756646

接线盒/Junction Box

M666



ADD: Building 90, 2nd Industrial area, Lisonglang Community, Gongming Street, Guangming District, Shenzhen, China

中国·广东省·深圳市·光明区公明街道李松荫社区第二工业区 90 栋

Website: www.greenwaycs.com




产品参数/Product parameters

型号 Model	M666
壳体 Housing	防火阻燃 Fire and flame retardant UL 94V-2
额定电流 Rated power	24A
额定电压 Rated voltage	450VAC
防护等级 IP code	IP66
适配端子 Terminal	PA10-3P端/ poles Terminal
工作温度 Working	T105
固体 Solid	0.5~2.5mm ²
适用线径（橡胶线） Available cable diameter(Roubber)	4-8mm 6-11mm 两种胶塞供选择 Two types of stoppers are available
产品尺寸 Product Size 参考实际尺寸	101.7*65.3mm Refer to actual
认证 Certification	ENEC UKCA CB CE RoHS
测试标准 Testing standard	1PCS/PE bag 100PCS/Carton



产品图纸/Product drawings

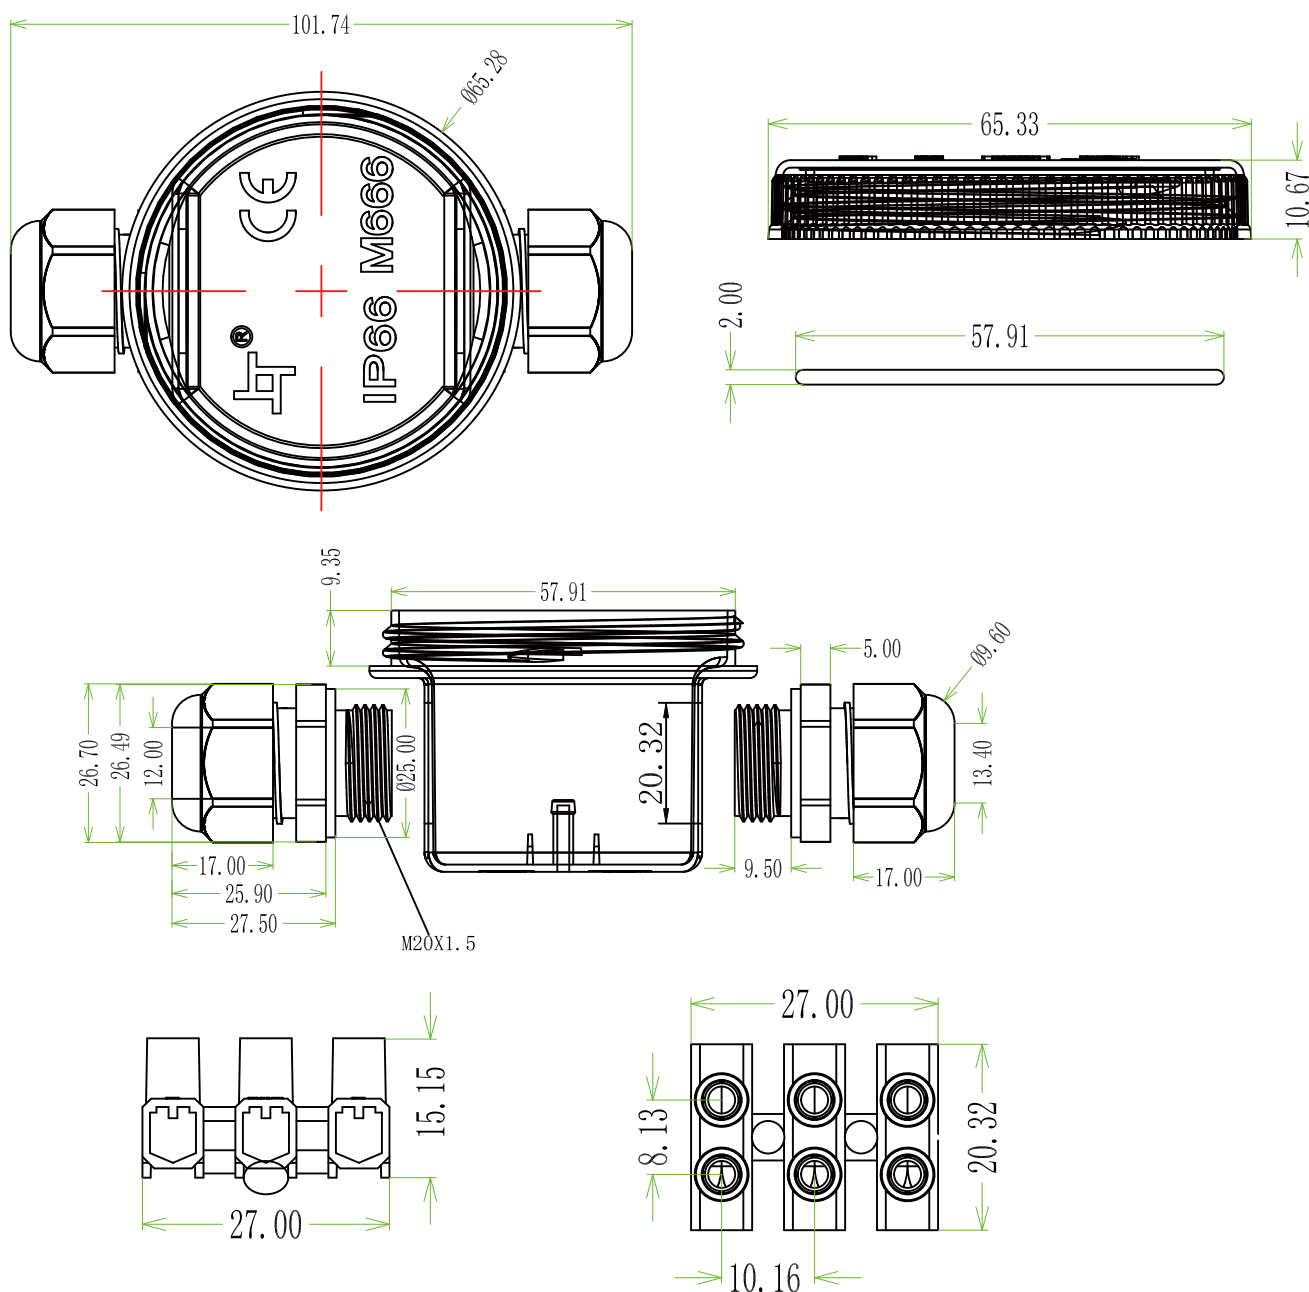

深圳市格林威电子有限公司

工程部 (签名)	模具部 (签名)	审核 (签名)	年、月、日 (年月日)	料号		产品图
谢东						M666