



IP68 防水接线盒/ waterproof junction box

M686-E





产品参数/Technical data


型号 Model	M686-E
材料 Material	UL94V-2 Fire and flame retardant
额定输出 Rated power	IEC/NSW:24A 450VAC ETL:10-15A 300VAC
防护等级 IP code	IP68
工作温度 Working	T105
接线范围 Rated connecting capacity	欧规 European:0.5 ~ 2.5mm ² 澳规 Australia:0.5 ~ 2.5mm ² 美规 American: SJOW 14-18AWG
密封胶塞/seal plug	
胶塞孔径/plug aperturer	8mm
适用线径/Available cable diameter (橡胶圆线/Round rubber cable)	2*M25 (6-8mm)
防水测试 Testing	10M 150hours
产品尺寸 Product Size(参考实际尺寸图)	外尺寸/External dimensions: 226.2*88.1*47.5mm 内尺寸/Internal dimensions: 152*71.5*35.7mm (Refer to actual drawing)
认证 Certification	ENEC,CE,UKCA,ETL,NSW,CB,ROHS
产品质保/Quality Assurance	1 年/ one year

注/Mark:

- 1.不能使用在盐碱土壤/Do not use in saline soil
- 2.不能长期接触油性物质或浸泡在油污中/Do not contact oily substances or soak in oil for a long time
- 3.不建议长期在日照暴晒下使用/Long time exposed under sunshine is not recommended



产品图纸/Product drawings

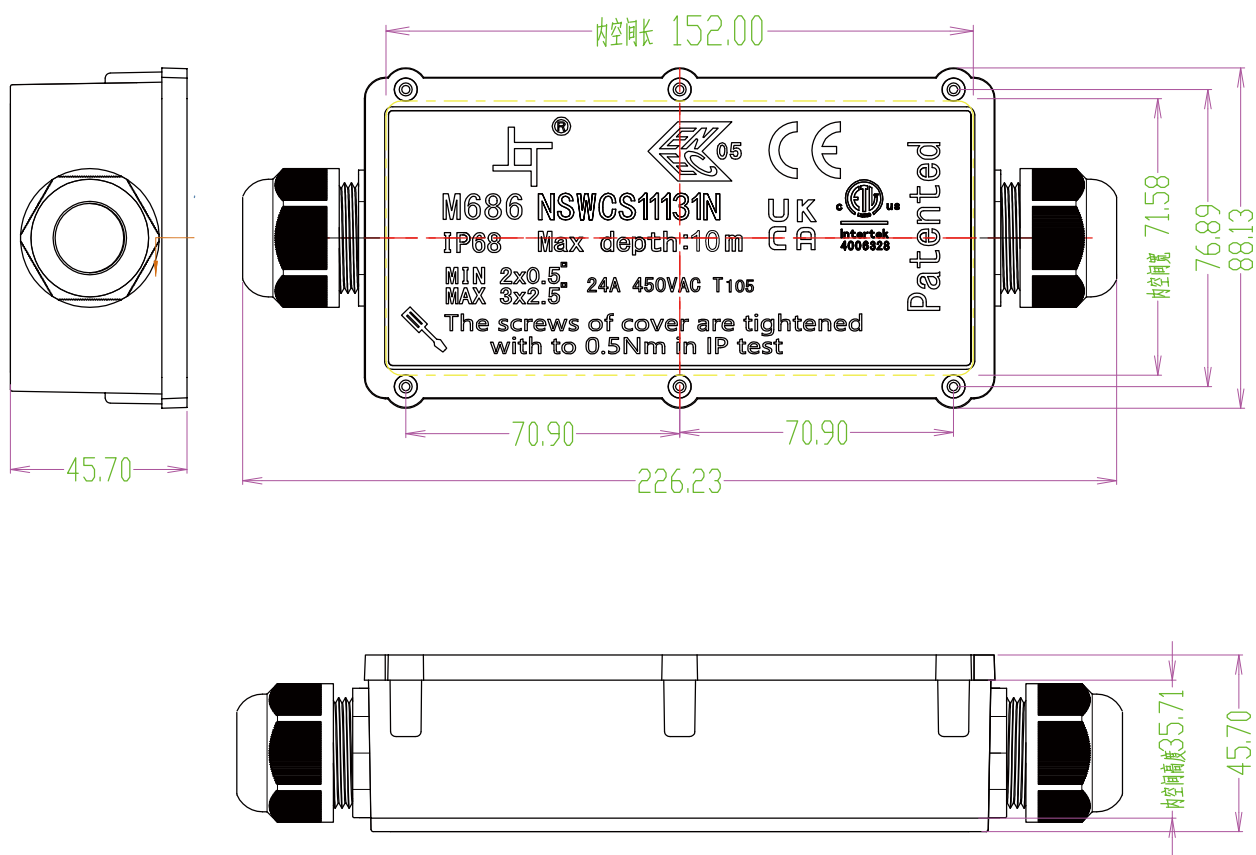

工程 部 (签名)	模具 部 (签名)	审 核 (签名)	年、月、日 (年月日)	料 号		产 品 图
深圳市格林威电子有限公司	谢东					M686-E