



IP68 防水接线盒/ waterproof junction box

M686-H



可选择端子/Optional Terminal

PA10-4



863-4








产品参数/Technical data

型号 Model	M686-H			
材料 Material	UL94V-2 Fire and flame retardant			
额定输出 Rated power	IEC/NSW:24A 450VAC ETL:10-15A 300VAC			
防护等级 IP code	IP68			
接线端子 Terminal	PA10 terminal or other terminals available			
工作温度 Working	T105			
接线范围 Rated connecting capacity	欧规 European:0.5 ~ 4.0mm² 澳规 Australia:0.5 ~ 4.0mm² 美规 American: SJOW 14-18AWG			
密封胶塞/seal plug				
胶塞孔径/plug aperturer	6mm	8mm	12mm	14mm
适用线径/Available cable diameter (橡胶圆线/Round rubber cable)	4*M25 (3-6mm)	4*M25 (4-8mm)	4*M25 (8-12mm)	4*M25 (10-14mm)
防水测试 Testing	10M 150hours			
产品尺寸 Product Size(参考实际尺寸图)	外尺寸/External dimensions: 114.44*106.67*35.3mm 内尺寸/Internal dimensions: 70*51*27mm (Refer to actual drawing)			
认证 Certification	ENEC,CE,UKCA,ETL,NSW,CB,ROHS			
产品质保/Quality Assurance	1 年/ one year			
产品应用/Application	水底/Underwater(淡水 fresh water) 地埋/Underground			
注/Mark: 1.不能使用在盐碱土壤/Do not use in saline soil 2.不能长期接触油性物质或浸泡在油污中/Do not contact oily substances or soak in oil for a long time 3.不建议长期在日照暴晒下使用/Long time exposed under sunshine is not recommended				



Fax:+0755-29756646

Technical drawing of a square flange with four mounting holes and four threaded inserts. The drawing shows dimensions for overall size, hole positions, and hole diameters. Key dimensions include: overall width 106.67 ± 0.10 , overall height 114.44 ± 0.10 , distance between hole centers 49.00 , distance from hole center to corner 19.50 , hole diameter $4-\text{Ø}4.80$, and corner radius 20.00 . Section lines A-A and B-B are indicated.

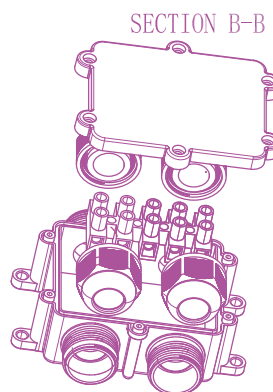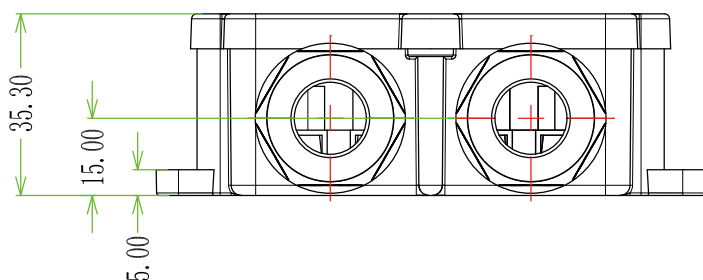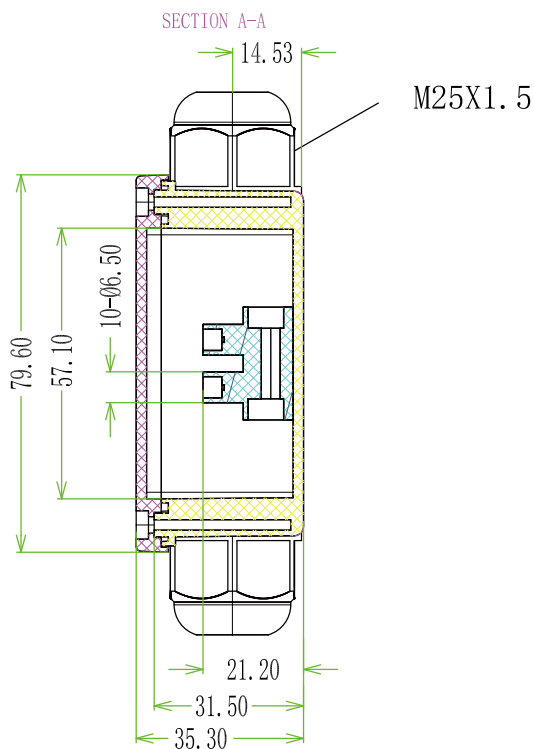

工程 部 (签名)	模具 部 (签名)	审 核 (签名)	年、月、日 (年月日)	料 号		产 品 图
谢东						M686-H

Website: www.greenwaycs.com



产品分解/Product breakdown

