



深圳格林威电子
GREENWAYCS

Tel: +0755-29756655

Fax: +0755-29756646

IP68 防水接线器/ waterproof connector

M685一进四出(2P-5P)



2P



3P



4P



5P



NSW

**UK
CA**

CB

RoHS

ADD: Building 90, 2nd Industrial area, Lisonglang Community, Gongming Street, Guangming District, Shenzhen, China

中国·广东省·深圳市·光明区公明街道李松荫社区第二工业区 90 栋

Website: www.greenwaycs.com




产品参数/Technical data

型号 Model	M685一进四出			
材料 Material	防火阻燃 Fire and flame retardant UL94V-2			
额定输出 Rated output	IEC/NSW:32A 450VAC ETL:18A 300VAC			
防护等级 IP code	IP68			
接线内芯 Terminal	2P/3P/4P/5P			
工作温度 Working	T105			
接线范围 Rated connecting capacity	欧规 European:0.5 ~ 4.0mm² 澳规 Australia:0.5 ~ 4.0mm² 美规 American:SJOW 12-14AWG			
密封胶塞/seal plug				
胶塞孔径/plug aperture	8mm	12mm	14mm	7mm
适用线径/Available cable diameter (橡胶圆线/Round rubber cable)	1 in			4 out
	1*M25(4-8mm)	1*M25(8-12mm)	1*M25(10-14mm)	1*M25(3-7mm)
防水测试 Testing	20M 150hours			
参考剥线长度 Refer to stripping length	外剥线 External stripping 25mm 内剥线 Internal stripping 7mm			
产品尺寸 Product Size(参考实际尺寸图)	112.2*30mm (Refer to actual drawing)			
认证 Certification	ENEC,CE,UKCA,ETL,NSW,CB,ROHS			
产品质保/Product warranty	1 年/ one year			
产品应用/Application	水底/Underwater(淡水 fresh water) 地埋/Underground			
注/Mark: 1.不能使用在盐碱土壤/Do not use in saline soil 2.不能长期接触油性物质或浸泡在油污中/Do not contact oily substances or soak in oil for a long time 3.不建议长期在日照暴晒下使用/Long time exposed under sunshine is not recommended				



产品图纸/Product drawings

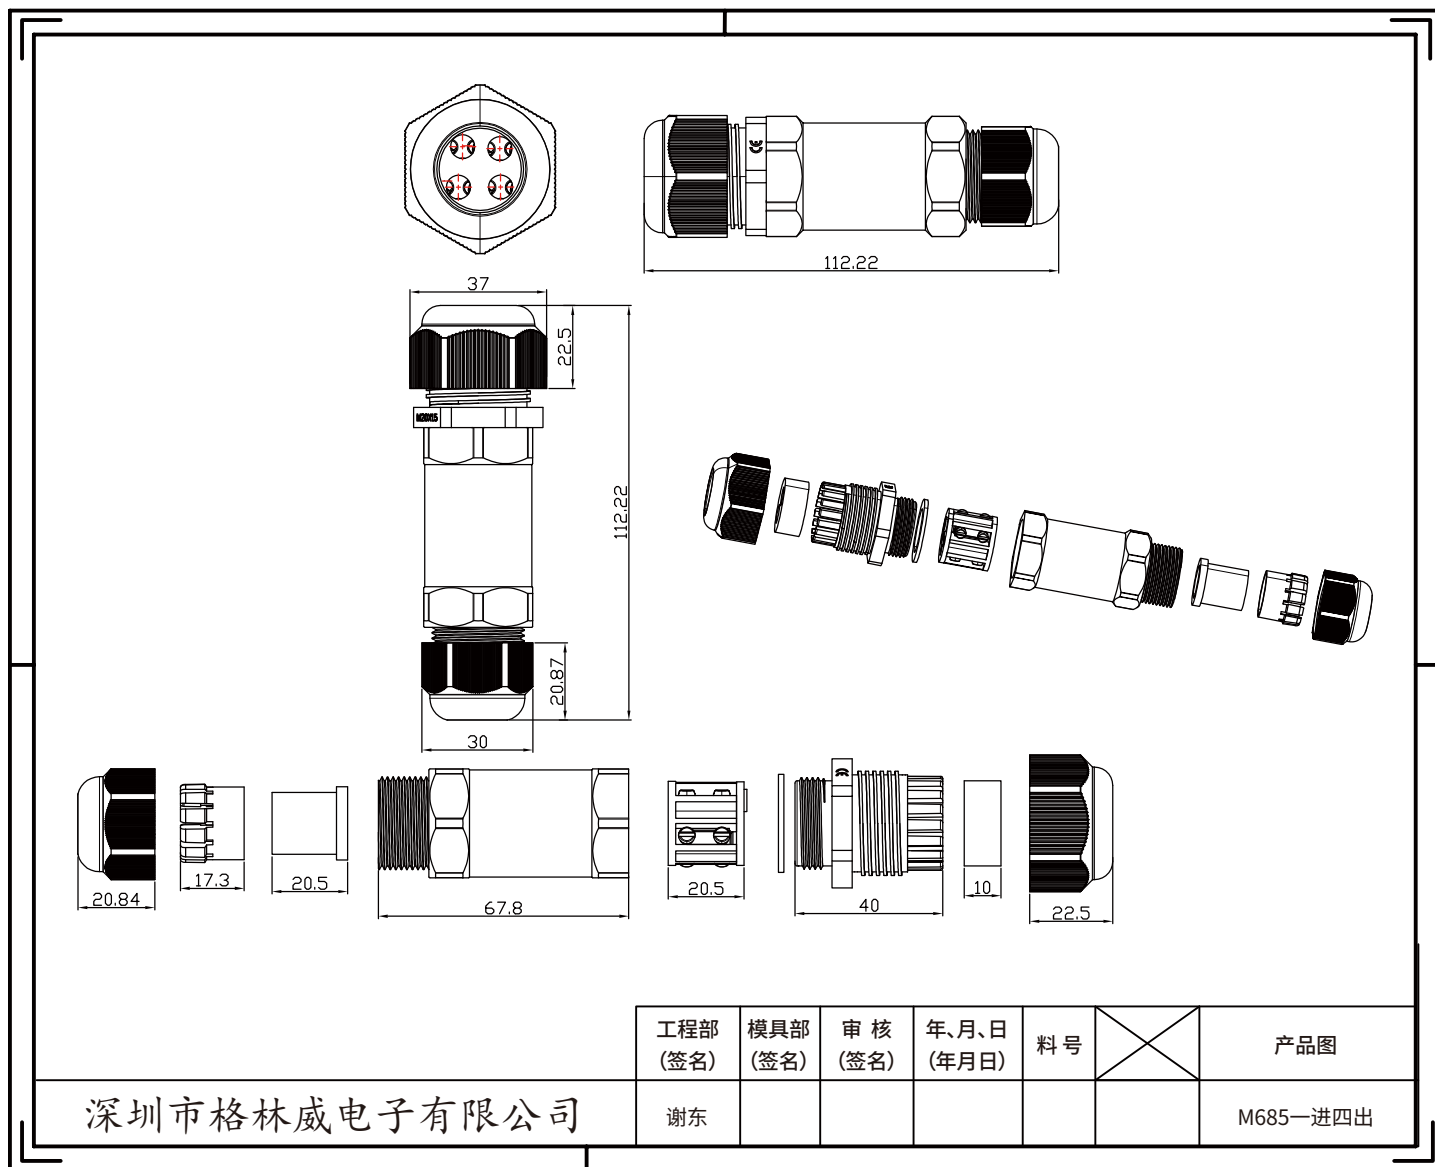

参考剥线长度
Refer to stripping length

