






电流限制器/Current limiter

GICL1

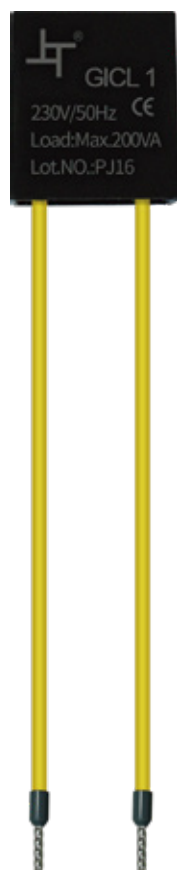

产品应用图

Product Applications

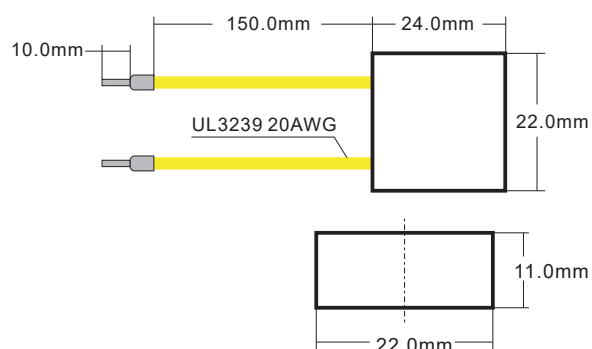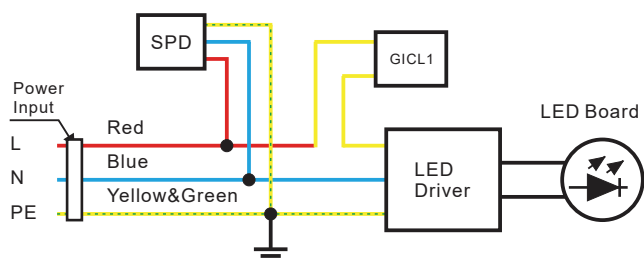



产品参数/Product parameters

规格/Datasheet	美规/ETL
工作电压/Input Voltage(Uc)	230VAC 50Hz
保护电压/Protection voltage(Up)	<90A@1mS
最大持续电压/Maximum Continous Voltage(Mcov)	275V
最大功率/Maximum power	<200VA
标准负载电流/Nominal Load Current	800mA
最大负载电流/Maximum Load Current	≤5A
标准漏电流/Standard Leakage Current	<1uA
响应时间/Response Time	<5nS
接口类型Interface Type	2线/ Wires
防护功能/Connection Type	Recoverable
防护等级/Ingress Protection	IP 67
阻燃等级/Flame Rating	UL 94-V0/V1
相对湿度/Relative Humidity	<95%(25°C)
海拔高度/Above Sea Level	<5000m
工作温度范围/Operating Temperature Range	-40-+85°C
储存温度范围/Storage Temperature Range	-40-+125°C
尺寸/Dimensions	LXTXW=184*22*11mm
产品证书/Certification	CE RoHS
包装/Package	24pcs/box 480pcs/carton
质保/Quality Assurance	根据国家三包政策质保1年（雷击损坏不在质保范围内） 1 year warranty according to the national three guarantees policy (lightning damage is not covered by the warranty)