




防雷器/Surge Protection Device series GSM-401




产品应用图

Product Applications

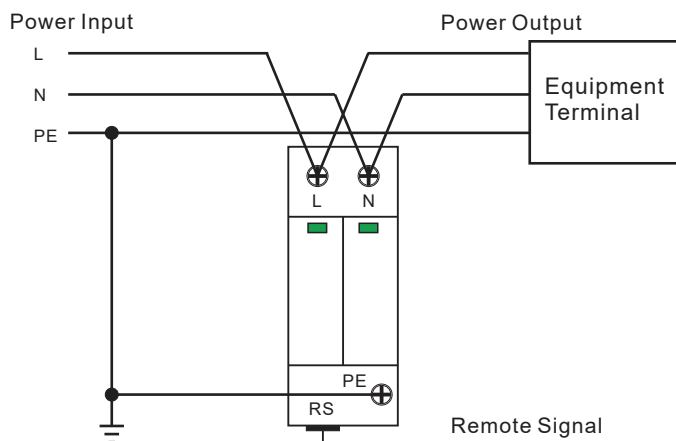

产品图纸

Product drawings

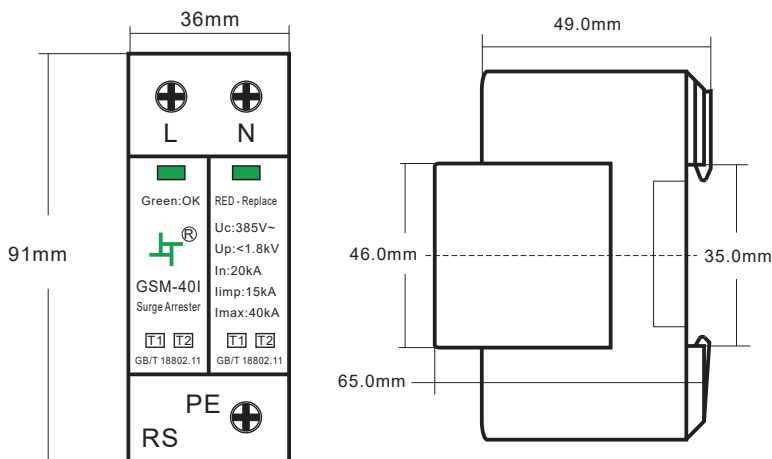



产品参数/Product parameters

工作电压/Input Voltage(Uc)	230VAC 50/60Hz
保护电压/Protection voltage(Up)	< 1800V
最大持续电压/Maximum Continuous Voltage(Mcov)	385V
冲击电压/Uoc	40kV
标准放电电流/Standard discharge current In (8/20uS)	20kA
最大放电电流/Standard discharge current Imax (8/20uS)	40kA
最大电流/Standard discharge current In (10/350uS)	15kA
标准漏电流/Standard Leakage Current	<20uA
响应时间/Response time	< 25nS
接口类型Interface Type	3 Mounting hole
连接类型/Connection Type	平行/Parallel
防护等级/Ingress Protection	IP 20
阻燃等级/Flame Rating	UL 94-V0/V1
相对湿度/Relative Humidity	<95%(25°C)
海拔高度/Above Sea Level	<5000m
工作温度范围/Operating Temperature Range	-40-+85°C
储存温度范围/Storage Temperature Range	-40-+125°C
尺寸/Dimensions	LXTXW=91*36*65mm
产品证书/Certification	CE RoHS
质保/Quality Assurance	根据国家三包政策质保1年（雷击损坏不在质保范围内） 1 year warranty according to the national three guarantees policy (lightning damage is not covered by the warranty)
包装/Package	1pcs/box,54pcs/carton