




防雷器/Surge Protection Device series GSM-RS232




产品应用图

Product Applications

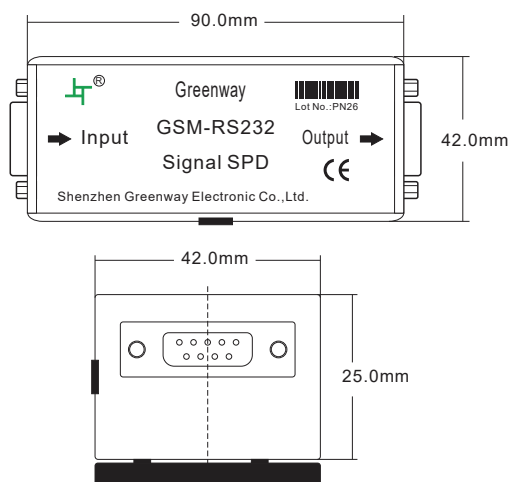

产品图纸

Product drawings

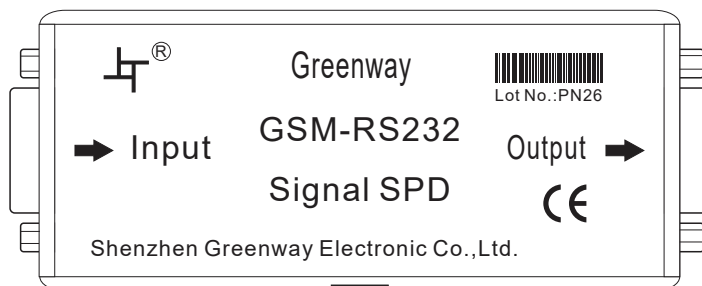



产品参数/Product parameters

数据速度/Data speed	19200b/s
保护电压/Protection voltage(Up)	<400V
冲击电压/Uoc	10kV
标准放电电流/Standard discharge current In (8/20uS)	5kA
最大放电电流/Standard discharge current Imax (8/20uS)	10kA
输入终端/Input Terminal	DB9
输出终端/Output Terminal	DB9
标准漏电流/Standard Leakage Current	<1uA
响应时间/Response time	< 1nS
接口类型Interface Type	DB9/DB9
连接类型/Connection Type	系列/Series
防护等级/Ingress Protection	IP 20
数据保护/Data Protection	With PE
相对湿度/Relative Humidity	<95%(25°C)
海拔高度/Above Sea Level	<5000m
工作温度范围/Operating Temperature Range	-40-+85°C
储存温度范围/Storage Temperature Range	-40-+125°C
尺寸/Dimensions	LXTXW=90*25*42mm
产品证书/Certification	CE RoHS
质保/Quality Assurance	根据国家三包政策质保1年（雷击损坏不在质保范围内） 1 year warranty according to the national three guarantees policy (lightning damage is not covered by the warranty)
包装/Package	1pcs/box,45pcs/carton