




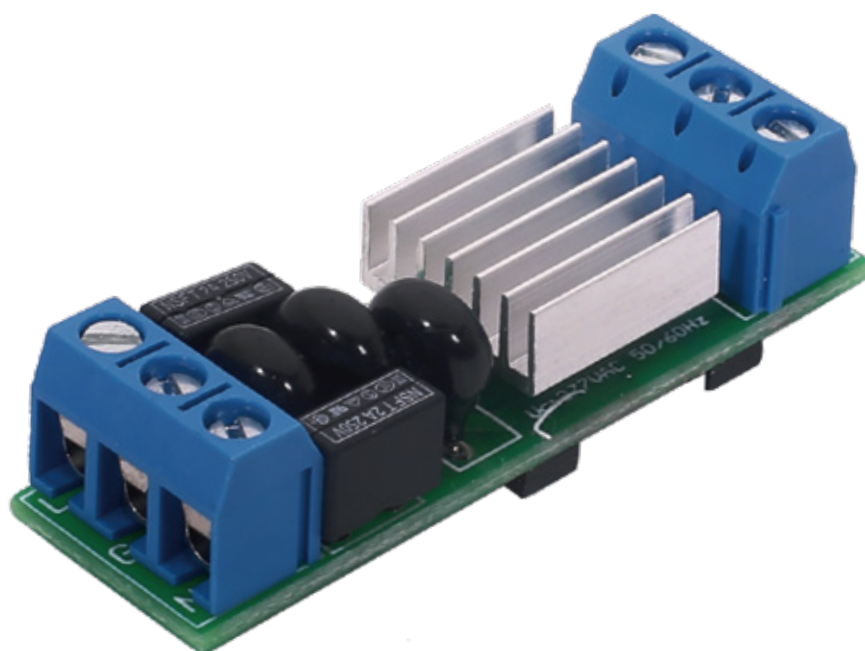

过压保护器/Overtvoltage protector M985

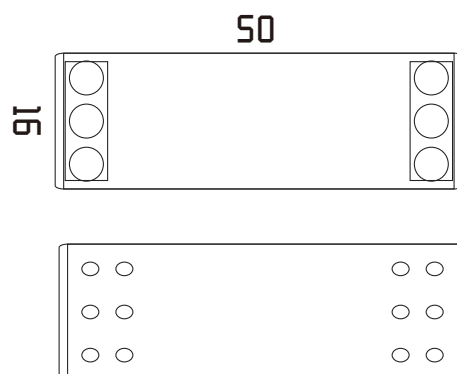

产品应用图 Product Applications

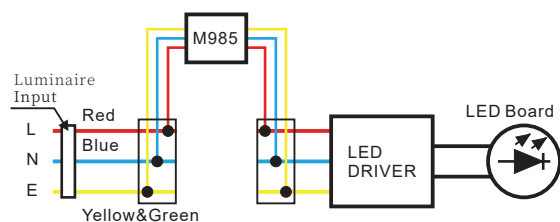



产品参数/Product parameters

规格/Datasheet	欧规/CE
工作电压/Input Voltage(Uc)	100-277VAC 50/60Hz
保护电压/Protection voltage(Up)	775V
最大持续电压/Maximum Continous Voltage(Mcov)	277V
冲击电压/Uoc	2.5kV
标准放电电流/Standard discharge current In (8/20uS)	1.2kA
最大放电流/Standard discharge current Imax (8/20uS)	2.0kA
标准漏电流/Standard Leakage Current	<50uA
最大能量/Maximum Energy	120焦耳/120 joules
过电压压保护/Over-Voltage Protection	280VAC
接口类型Interface Type	3 Terminal
连接类型/Connection Type	串联/Series
阻燃等级/Flame Rating	UL 94-V0
相对湿度/Relative Humidity	<95%(25°C)
海拔高度/Above Sea Level	<5000m
工作温度范围/Operating Temperature Range	-40-+85°C
储存温度范围/Storage Temperature Range	-40-+125°C
尺寸/Dimensions	LXTXW=50*16*14mm
产品证书/Certification	CE RoHS
质保/Quality Assurance	根据国家三包政策质保1年（雷击损坏不在质保范围内） 1 year warranty according to the national three guarantees policy (lightning damage is not covered by the warranty)