




太阳能路灯安全型控制盒/The solar street light security box M999-24PV



RoHS


产品应用图

Product Applications

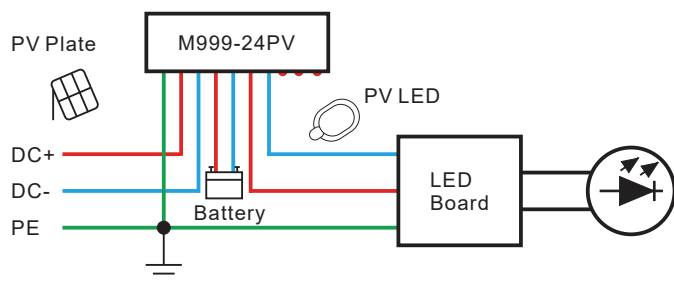

产品图纸

Product drawings

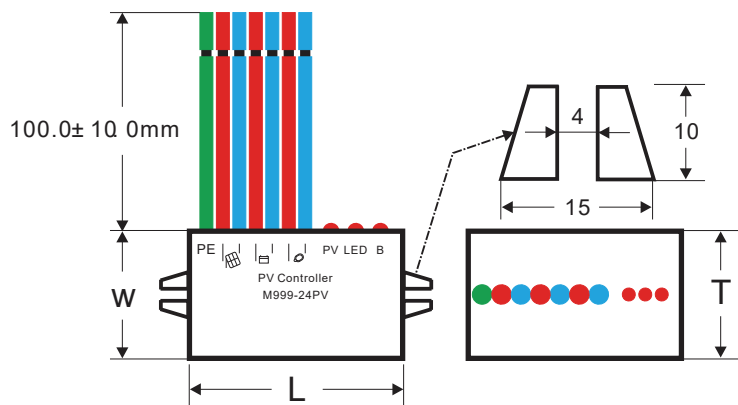



产品参数/Product parameters

工作电压/Input Voltage(Uc)	12-24VDC
保护电压/Protection voltage(U _p)	< 500V
最大持续电压/Maximum Continuous Voltage(Mcov)	30VDC
浪涌保护电压/Surge Protection Voltage	6kV
标准放电电流/Standard discharge current I _n (8/20uS)	3kA
最大放电电流/Standard discharge current I _{max} (8/20uS)	6kA
指示/Indication	Yes
标准漏电流/Standard Leakage Current	< 1uA
响应时间/Response time	< 1nS
接口类型Interface Type	7 Wires
连接类型/Connection Type	平行/Parallel
防护等级/Ingress Protection	IP 20
阻燃等级/Flame Rating	UL 94-V0/V1
相对湿度/Relative Humidity	<95%(25°C)
海拔高度/Above Sea Level	<5000m
工作温度范围/Operating Temperature Range	-40-+85°C
储存温度范围/Storage Temperature Range	-40-+125°C
尺寸/Dimensions	LXTXW=47*36*49mm
产品证书/Certification	RoHS
包装/Package	15pcs/box,90pcs/carton
质保/Quality Assurance	根据国家三包政策质保1年（雷击损坏不在质保范围内） 1 year warranty according to the national three guarantees policy (lightning damage is not covered by the warranty)